

NEW PFA Housing



Descriptions

- Constructed of new PFA
- Good chemical resistance in strong chemical process.
- Good heat resistance.
- Minimum extractables.
- No fracture by twist of O-ring

Application

- Most acids, bases and solvents at temperatures up to 80°C
- Viscous chemicals such as room temperature acids

Materials


Housing	New PFA
O-ring	Viton, TEV

Specifications


IN, OUT Connection	3/4" tube connection 1" tube connection 3/4" NPT female connection
Max. Differential Pressure	5kgf(at 25°C)
Max. Temperature	50°C

Dimensions

3/4 Inch tube connection

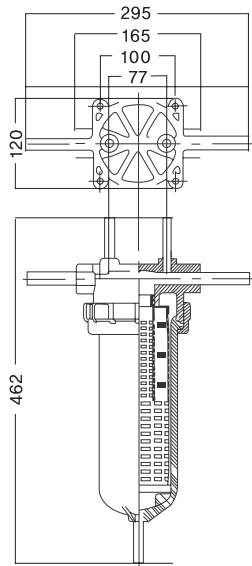

3/4 Inch NPT female connection

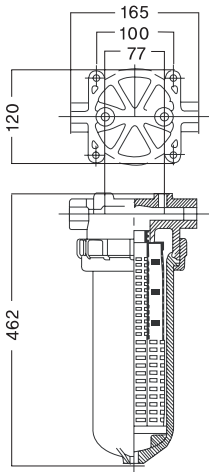

Option & Accessories



Option



Accessories