

PP Housing for UHV Type



Descriptions

- Constructed of PP for HEAD, PP for BOWL, PVC for union.
- Good chemical resistance in strong chemical process.
- Good heat resistance.
- Minimum extractables.



Materials

HEAD	Polypropylene
BOWL	Polypropylene
UNION	Polypropylene

Specifications

IN, OUT Connection	40A / 50A
Vent, Drain	3/8" NPT
Cartridge Connection	334 O-ring
Max. Differential Pressure	5kgf(at 25°C)
Max. Temperature	50°C

Dimensions

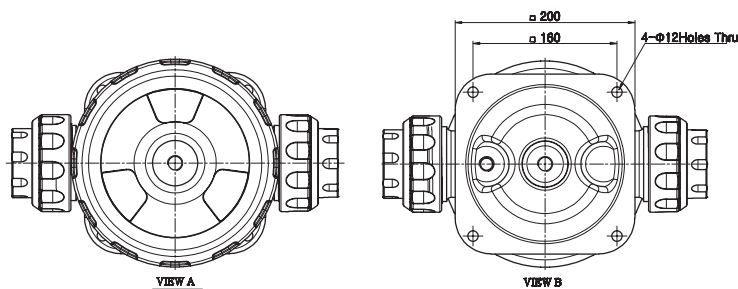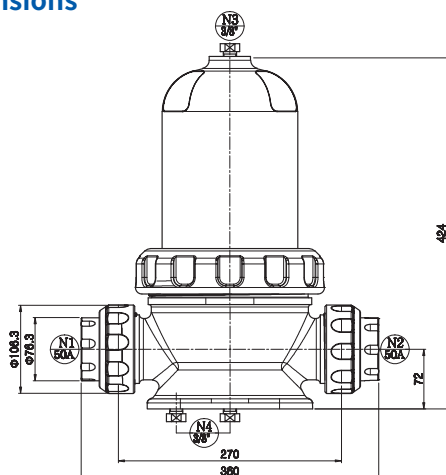

Ordering information

PVC Housing

HS 1 2 3 4 5

No. 1

Code	Length
1	10"

No. 2

Code	Material
PP	HEAD PP / BOWL PP

No. 3

Code	Connection
40	40A in/out
50	50A in/out

No. 4

Code	O-ring
N	NBR
E	EPDM
V	Viton
T	TEV

No. 5

Code	Length
K	2-334 O-ring/ Flat end