

PVC Housing



Descriptions

- Constructed of PVC for HEAD, PVC, PC for BOWL.
- Good chemical resistance in strong chemical process.
- Good heat resistance.
- Minimum extractables.


Materials

HEAD	PVC
BOWL	PVC / PC
UNION	PVC

Specifications

IN, OUT Connection	40A
Vent, Drain	1/4" NPT
Cartridge Connection	226 O-ring / 222 O-ring
Max. Differential Pressure	5kgf(at 25°C)
Max. Temperature	60°C

Dimensions

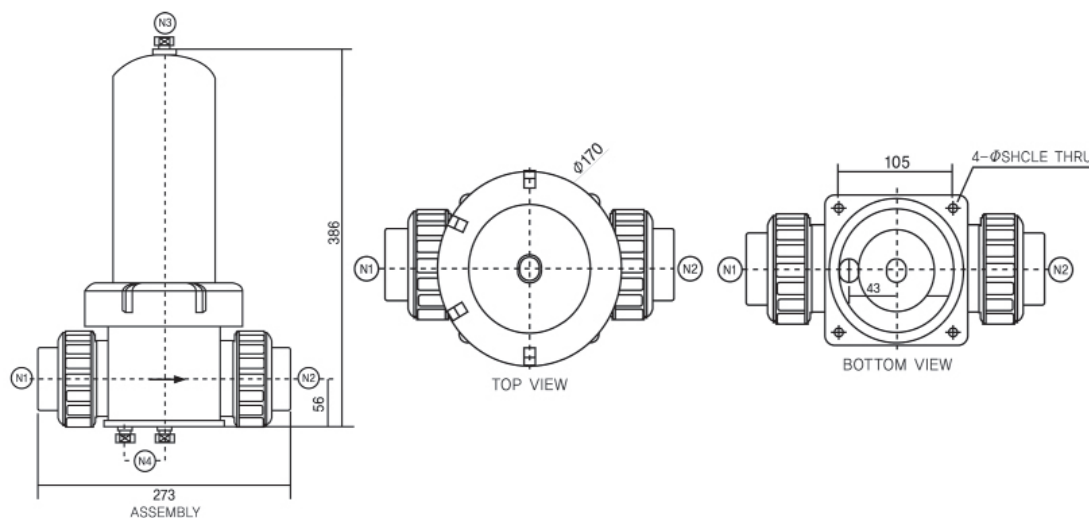

Ordering information

PVC Housing

HS	1	2	3	4	5
----	---	---	---	---	---

No. 1		No. 2		No. 3		No. 4		No. 5	
Code	Length	Code	Material	Code	Connection	Code	O-ring	Code	Cartridge Connection
1	10"	VW	HEAD PVC / BOWL PVC	40	40A in/out	N	NBR	D	2-226 O-ring / Flat end
		VC	HEAD PVC / BOWL PC			E	EPDM	M	2-222 O-ring / Flat end
						V	Viton		
						T	TEV		